

东莞市捷森电子有限公司

DONGGUAN J. S ELECTRONICS CO., LTD


Fixed inductors for surface mounting

ENR4018S SERIES


FEATURES/特点

- Excellent solderability and high heat resistance.
- Suitable for large currents.
- Is applicable to a wide range of DC-DC converters ideal For (DVD;DSC;phone; PDA;GPS;CMMB; Digital photo, Frame, telephone; CAR AV equipment and so on.)
- Current Rating: Based on the largest decline in ICP to 35 percent, and the temperature does not exceed 40degrees.
- Measuring frequency: 100KHz/0.25V

DIMENSIONS(mm) 外型尺寸

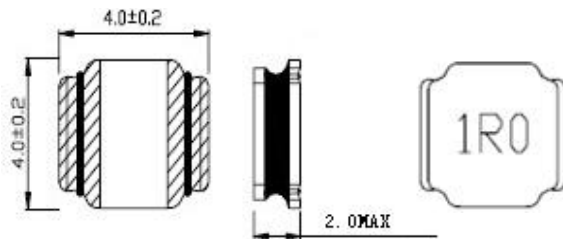

LAND PATTERNS(mm) 焊盘尺寸

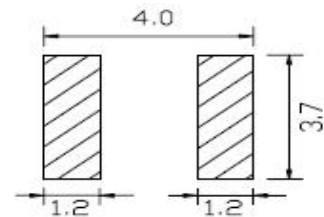

Type 型号	Indicate 表示	Inductance 电感量 (μH)	D. C. R (Max) 直流电阻 (mΩ)	Saturation Current 饱和电流 (A)
ENR4018S-1R0N	1R0	1.0μH±30%	39	4.00
ENR4018S-2R2M	2R2	2.2μH±20%	78	2.70
ENR4018S-3R3M	3R3	3.3μH±20%	91	2.00
ENR4018S-4R7M	4R7	4.7μH±20%	116	1.70
ENR4018S-6R8M	6R8	6.8μH±20%	142	1.45
ENR4018S-100M	100	10μH±20%	234	1.20
ENR4018S-150M	150	15μH±20%	325	0.94
ENR4018S-220M	220	22μH±20%	468	0.80
ENR4018S-330M	330	33μH±20%	685	0.65
ENR4018S-470M	470	47μH±20%	845	0.57
ENR4018S-680M	680	68μH±20%	1300	0.47
ENR4018S-101M	101	100μH±20%	1950	0.40
ENR4018S-151M	151	150μH±20%	3250	0.30
ENR4018S-221M	221	220μH±20%	5200	0.27

- Design according to customer requirements.
- Data recorded for reference only, all to provide samples of business shall prevail.
- Recorded content may be improved or changed without notice.